


September 31st, container grown trees must be planted specified in Tree Technical Manual, Section 3.5.2. from October 1st till March 31st. From April 1st till

NOTE: PLANT QUANTITIES SHOWN IN PLANTING LIST ARE INTENDED FOR ESTIMATING PURPOSES ONLY. IF DIFFERENCES IN PLANT MATERIAL QUANTITIES EXIST BETWEEN THE PLANTING LIST AND THE PLANTING PLAN, QUANTITIES SHOWN IN THE PLANTING PLAN SHALL PREVAIL.



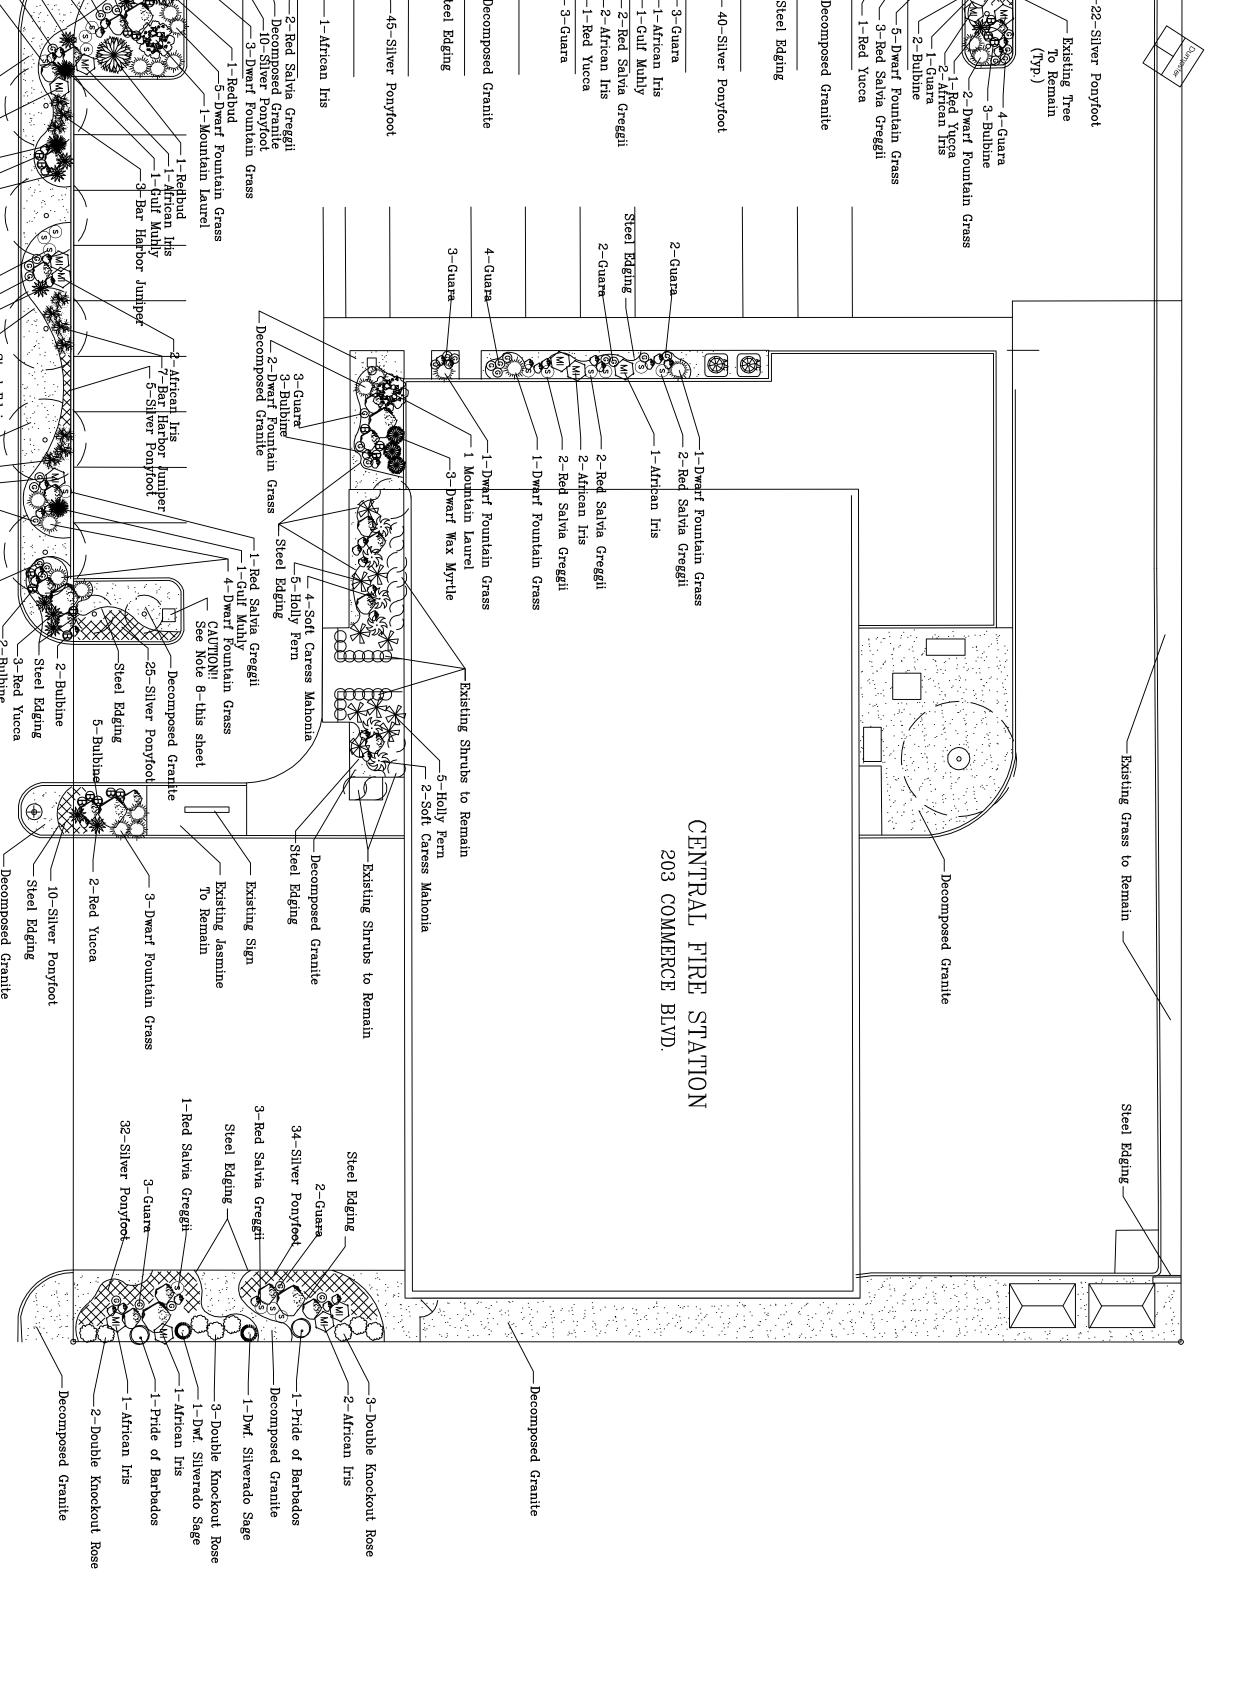

ENTERPRISE DRIVE

Steel Edging

40-Silver

Steel Edging

1-African Iris

Plant Legend

Mountain Laurel

Double Knockout

African Iris

Pride of Barbados

Bar Harbor Juniper Silverado Sage

Red

Gulf Muhly

Soft Caress Holly Fern Red Salvia Greggii Mahonia

Dwarf Fountain Grass

Silver Ponyfoot

0

Boulder Decomposed Granite

Existing Shrub to

DRIP:

Existing Tree to

3). Adjustable flow controls shall be required on circuit control valves. Pressure regulation components(s) shall required where static pressure exceeds manufacturer's recommended operating range.

4). Valves and circuits shall be separated based on water use requirements, so that turf areas can be watered separately from shrubs, trees and groundcover areas.

6). The drip tubing in planting areas shall be connected to the drip tubing in adjacent planting areas with PVC pipe or non-perforated tubing. IE, do not irrigate the decomposed granite areas.

8). There is a memorial plaque marking the burial site of "Salvage" The fire station dog. Use caution to not damage or remove the plaque and, when excavating, to not disturb the remains.

CENTER © .9gph) THE

1903 ASTER WAY ROUND ROCK, TEX (512) 924-2955

WAY K, TEXAS

78665

> Z

 \Box

BOST

SHEET NO.

 \circ

Notes:

All disturbed landscape areas not otherwise designated as planting beds for trees, shrubs, or groundcover shall be revegetated by solid-sodding with Tiff Bermuda Grass All planting beds which are adjacent to grass areas edged with Ryerson steel edging or equal. shall be

Contractor shall supply all materials, equipement, labor, etc. to convert from the existing automatic underground spray irrigation system to an automatic drip irrigation system in the proposed landscape areas. rimeter parking lot shrubs that are within groupings shall be spaced no more that 4 48"

All proposed landscape plantings shall be irrigated by the underground automatic drip system. The system shall adhere to manufacturer specifications and the rules and regulations established by the Texas Commission for Environmental Quality (TCEQ) or successor agency. The system will be designed by a landscape architect or irrigator licensed by the State of Texas. All newly planted trees will be irrigated with 2 loops of drip tubing circling the root ball.

The irrigation system shall be adjusted to water adequately while minimizing run-off onto non-irrigated areas (ie, paving, walkway, building)..

5). Planting areas that are not hatched for decomposed granite shall be top dressed with a 3" layer of hardwood mulch.

7). See planting and irrigation notes and details on Sheet L-2.

DRIPLINE AND FITTINGS SHALL BE MANUFACTURED BY NETAFIM DRIPLINE SHALL BE TECHLINE CV —TLCV9—12— DRIPPERS EVERY 12" @ .5 DRIPLINE TO BE INSTALLED AFTER PLANTING. SHOULD BE STAKED TO THE GROUND EVERY 3 TO 4 FEET AND TWICE AT EACH FITTING.

USE TECHLINE FITTING, TL075MA, TO CONNECT TECHLINE CV TO PVC. INSTALL AS PER MANUFACTURERS SPECIFICATIONS AND TRY TO USE CENFEED SET—UP WHERE APPLICABLE.

TECHLINE CV DOES NOT REQUIRE THE INSTALLATION OF AIR RELIEF AND FLUSH VALVES.

Salvia Greggii


COMMERCE BOULEVA

RD

∠3-Guara ∠3-Gu ∠1-African Iris —3-Bar Harbor Juniper -Decomposed Granite

ROUND ROCK CENTRAL FIRE STATION 203 COMMERCE BLVD., ROUND ROCK, TX

THE TEXAS BOARD OF ARCHITECTURAL EXAMINERS, P.O. BOX 12337, AUSTIN, TEXAS 78711, TELEPHONE (512)305-8543, HAS JURISDICTION OVER INDIVIDUALS LICENSED UNDER THE LANDSCAPE ARHITECTS REGISTRATION LAW ARTICLE 249C, VERNON'S TEXAS CIVIL STATUTES.



Drawn: NRE				
Chaolada				
Checked:				
Approved: DB				
Date: <u>June 16, 2014</u>				
	No.	DATE	REVISIONS	RECO

LANDSCAPE PLANTING PLAN

THE ORIGINAL DRAWINGS OF RECORD OF THIS PLAN ARE ARCHIVED AND KEPT AT THE LANDSCAPE ARCHITECT'S OFFICE AT 1903 ASTER WAY, ROUND ROCK, TEXAS ALL RIGHTS RESERVED
THE DESIGNS AND DRAWNGS HEREIN ARE THE PROPERTY
OF THE LANDSCAPE ARCHITECT, AND MAY NOT BE
REPRODUCED IN ANY FORM, BY ANY METHOD OR FOR ANY